



**GENERAL
DEVICES**

Electronic Hardware
Manufacturers

317-897-7000

sales@generaldevices.com

www.generaldevices.com



ISO 9001
FIM 80298



**BOTTOM MOUNT
SLIDES**

SLIDE SELECTION GUIDE

*Choose from the most complete
selection of standard and
custom slides available from
one single source.*

CHASSIS TRAK[®]
Telescopic Slides

**BALL BEARING
SLIDES**

**SOLID/ROLLER
BEARING SLIDES**



Ball Bearing Slides

CLB




The CLB has a front quick disconnect feature and locks out at full extension. Design modifications can be made to exact customer specifications.

SLIDE MODEL / LENGTHS AVAILABLE	LOAD CAPACITY
CLB-203 3/4 extension w/quick disconnect /10" - 30"	50 to 145 lbs.
CLB-223 Heavy duty 3/4 extension w/quick disconnect /10" - 30"	160 to 250 lbs.
CLB-305 Full extension w/Green Button release mechanism and .38 sliding thickness / 10" to 30"	75 to 140 lbs.
CLB-307 Full extension w/Green Button release mechanism and .64 sliding thickness /10" to 30"	75 to 175 lbs.
CLB-315 Full extension w/Green Button release mechanism and .45 sliding thickness / 14" to 30"	75 to 170 lbs.



LBS

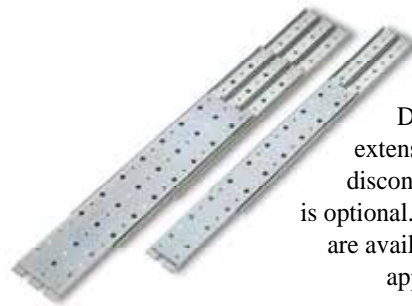

Designed for horizontal extension only and does not disconnect. Lock-out feature is optional. Design modifications are available to meet customer application requirements.

SLIDE MODEL / LENGTHS AVAILABLE	LOAD CAPACITY
LBS-11 3/4 extension / 10" -30"	50 to 145 lbs.
LBS-12 Full extension / 10" - 30"	75 to 180 lbs.
LBS-O Over-and-under full extension / 10" to 30"	75 to 180 lbs.
LBS-21 Heavy duty 3/4 extension / 10" to 30"	160 to 250 lbs.
LBS-22 Heavy duty full extension / 10" to 30"	360 to 605 lbs.
LBS-32 Extra heavy duty full extension / 10" to 30"	510 to 930 lbs.



Bottom Mount Slides

B-200/300



Designed for tension or compression loading. Slide locks in the extended position. Slides are identical, except the B-300 has automatic release from the extended position.

SLIDE MODEL / LENGTHS AVAILABLE	LOAD CAPACITY
B-200/B-300 / 10" to 30"	90 to 150 lbs.



C-7000



Linear bearing standard slide has positive stops but does not lock at any position. Optional lock-out feature is readily available.

SLIDE MODEL / LENGTHS AVAILABLE	LOAD CAPACITY
C-7000 / 10" to 30"	75 to 180 lbs.



C-938



Designed for compression loading only. Optional lock-in lock-out feature is available.

SLIDE MODEL / LENGTHS AVAILABLE	LOAD CAPACITY
C-938 Roller bearing bottom mount slide / 12" to 48"	85 to 400 lbs.



D-1050/1054



Extra heavy duty slide on solid rollers for vertical alignment and ball bearings for horizontal thrust. Slides are identical, except the D-1054 locks at the fully closed position and at the fully extended position.

SLIDE MODEL / LENGTHS AVAILABLE	LOAD CAPACITY
D-1050/1054 / 18" to 48"	475 to 1270 lbs.



